




Fitting template Carpal Hyperextension Orthosis




- 1 Apply the orthosis from the front side.




- 2 Pull the middle strap through the rectangular loop.




- 3 Fasten the middle strap and continue with the top strap.

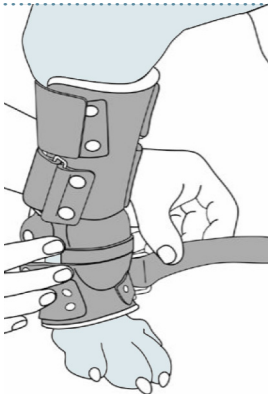


- 4 Fasten the lower strap last.

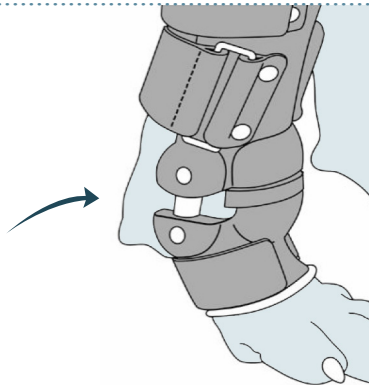

- 5 The mid point of the rubber joint should face the middle of the carpal joint vertically.



- 6 The lower strap should be aligned below the leg prominence.

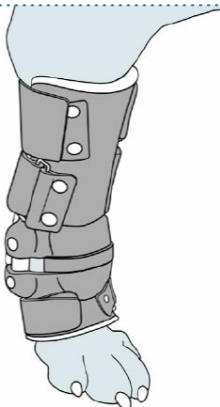

- 7 Make sure it's properly aligned and tightly fitted. The widest part of the orthosis should be aligned with the widest part of the carpal joint. Also make sure the orthosis is aligned with the gait direction.